

## TeleView Series

Expand your visual distance

Application: the positioning system can be widely used in open areas, such as urban roads, airports, highways, forests, rivers, ports, squares, campuses, scenic spots and large venues, etc.



### IPC7622ER-X44U 44X 300m IR Positioning System

- Professional mechanical design, high precision positioning
- Adopt gyroscope for image stabilization especially at tele side
- Powerful optical defog function



### IPC7622EL-X55UG 55X 1000m Laser Positioning System

- Built-in gradienter to ensure the horizontal position during installation
- Equipped with automatic wipers



**www.uniview.com**

Sales: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com)  
Technical Support: [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

2020.06.OM-2006801-SD-V2.0  
Disclaimer: All rights reserved, including final interpretation and content amendment.



# New Vertical Products



Better Security, Better World



Panoramic Camera Thermal PTZ Camera Positioning System



# OmniView 180° Panoramic Camera

180° clarity



**Application**  
OmniView panoramic camera is suitable for monitoring a wide range of areas, such as public plazas, arenas, airports, busy traffic stations, and campuses. There are a variety of mounting methods to choose from, which can perfectly meet the requirements that see more with just one camera.

### Multiple Mounting Methods



- 4 sensors, up to 4096×1800@30fps
- Video alignment for a seamless image
- Crossing line / intrusion detection trigger PTZ speed dome automatically tracking
- Support panoramic camera and PTZ linkage manually
- 5 ePTZ, support smart event setting on each ePTZ



**Application**  
Therma PTZ series cameras enable operators to monitor a wide range of areas for perimeter detection and fire prevention, such as gas stations, chemical plants, construction sites, airports, power stations, etc.



TIC7632ER-F75-2X55  
Thermal Positioning System




TIC6831ER-F50-4X38  
Thermal PTZ Speed Dome Camera




- Thermal**
- Up to 384×288 resolution
  - Adopt Vanadium Oxide Uncooled Focal Plane Arrays
  - NETD is less than 50 mK
  - 75mm fixed lens for positioning system, 50mm fixed lens for PTZ dome

- Visible**
- Up to 1920×1080 resolution
  - 55x optical zoom for positioning system
  - 38x optical zoom for PTZ dome

### DRI (Detection Recognition Identification) Distance

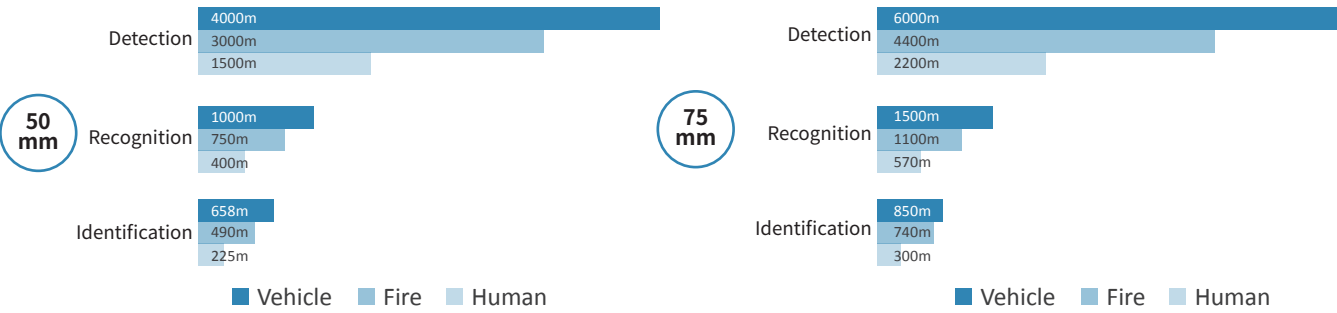


Notice: This distance is based on 17-μm sensor

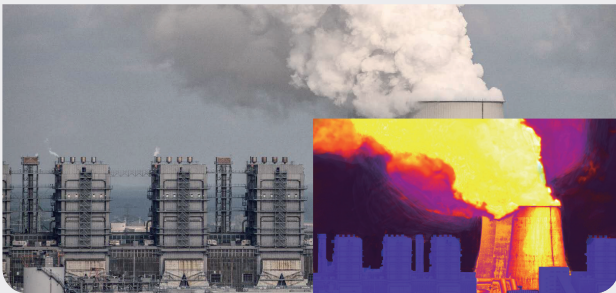


Excellent detection performance based on Bi-spectrum



Fire detection via advanced algorithm

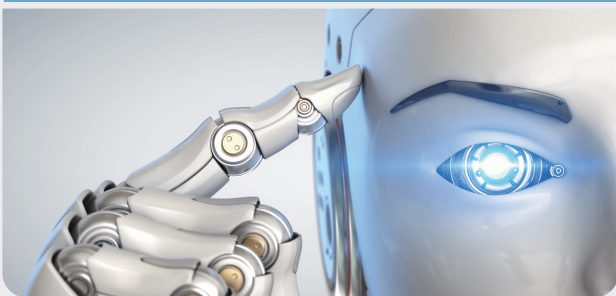

Accurate behavior analysis functions, based on deep learning algorithm including line crossing, intrusion, region entry and exit

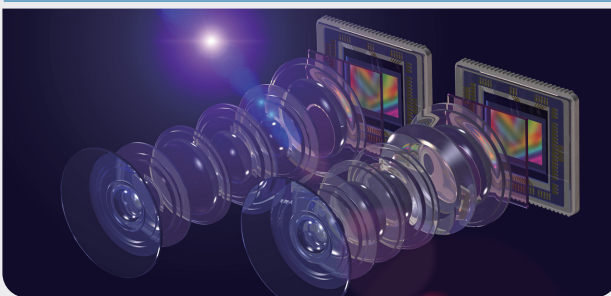

Single IP address, dual video